



warm hearted, hand crafted

SOLE DISTRIBUTOR FOR MALAYSIA

JOVEN MARKETING SDN. BHD. (356796-V)
Lot 2829, Jalan Sungai Kelkat 32/148,
Off Jalan Sri Gambut, Seksyen 32,
40460 Shah Alam, Selangor Darul Ehsan, Malaysia.
Tel : +603 5162 6633 (Hunting Line)
Fax : +603 5162 3636 (General)
: +603 5162 6634 (After Sales Service)
Email : jovernmkt@joven.com.my
Website : www.joven.com.my

BRANCHES

PENANG / KEDAH / PERLIS

No 7375, 2nd Floor, Jalan Raja Uda,
12300 Butterworth, Penang
Tel : +604 332 3018
Fax : +604 332 3198

IPOH

No 96A, 1st Floor, Jalan Tasek Timur,
Taman Tasek Indra, 31400 Ipoh, Perak
Tel : +605-545 0302
Fax : +605-545 0318

MELAKA

No 65-2, Jalan SP 1,
Taman Semabok Perdana,
75050 Semabok, Melaka
Tel : +606-282 6088
Fax : +606-282 5088

MANUFACTURER

JOVEN ELECTRIC CO. SDN. BHD. (107915-U)
Lot 2829, Jalan Sungai Kelkat 32/148,
Off Jalan Sri Gambut, Seksyen 32,
40460 Shah Alam, Selangor Darul Ehsan, Malaysia.
Tel : +603 5162 8000
Fax : +603 5162 1881
Email : admin@joven-electric.com
Website : www.joven-electric.com



JOHOR BAHRU

8-02, Jalan Kempas Utama 2/2,
Taman Kempas Utama,
81200 Johor Bahru, Johor
Tel : +607-595 3139
Fax : +607-595 3195

KOTA BHARU

3180-F, 1st Floor,
Jalan Sultan Ibrahim,
15050 Kota Bharu, Kelantan
Tel : +609-747 9978
Fax : +609-747 8962

KUANTAN

A133-2, Jalan Haji Abdul Aziz,
25000 Kuantan, Pahang
Tel : +609-531 5456
Fax : +609-531 5456

KUCHING

SL8, LRG.7, Ensing Timur,
Jalan Stapok Timur,
93250 Kuching, Sarawak
Tel : +6082-686 559
Fax : +6082-687 559

KOTA KINABALU

Lot 4, Jalan Tombovo Meruntum, Central
Industrial Park, Kg Tombovo, Putatan,
Penampang, 88200 Kota Kinabalu, Sabah
Tel : +6088-773 700
Fax : +6088-773 701

Authorised Dealer

Pictures are for illustration purpose only. Model outlook and specification may change in the future without prior notice.

www.joven.com.my

© copyright 05/2022 JOVEN



Brand Excellence
Award 2009
Merchandise



SME Brand
Excellence Award
2012



The Brand Laureate
Brand Innovator of the Year &
Brand Excellence Award
2017

JOVEN
since 1983
Bringing Innovation Home™


The Compact & Elegant SA Series



Crafted for Perfection
Designed to Complement.

SA Series
Instant Hot Shower

SA10e • SA8e

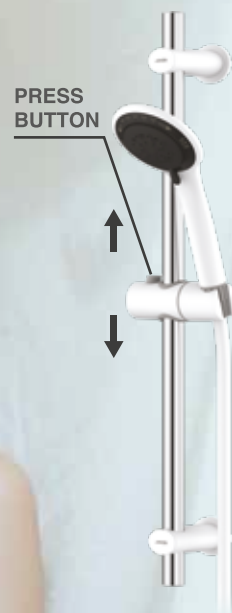

SA10e



SLIM SLIDER
BAR SET



SA8e



Wide Spray



Combo Spray



Jet Spray



Medium Spray



Mixed Spray

5 SPRAY
OPTIONS



**Built-in Double Pole
EELS System**

- 10mA Sensitivity
- Surge Protector
- Test / Reset Safety Function



Electronic Power Control

- Stepless Electronic Power Control
- Ideal Shower Temperature
- Energy Saving

The SA Series

SA10e



White

SA8e



White

Specification

Electrical Loading	3.6kW 15A 240Va.c. 50Hz
Built-in EELS System	Double Pole 10mA Sensitivity
Min. Water Pressure	10kPa / 1.45 psi / 0.1 bar
Max. Water Pressure	380 kPa / 55 psi / 3.8 bar
Min. Water Flow	2 Liters per Minute
Max. Water Flow	8 Liters per Minute
Water Temp. Control	Stepless Electronic Power Control
Inlet/Outlet Connection	15mm (1/2" BSP) – Single Point System
ABS casing	Splash Proof Casing IP25
Dimensions	221 x 341 x 76 mm
Weight	SA10e: 2.8 kg SA8e: 2.3kg



INTERNAL PARTS

- 1 Year Warranty On Internal Parts.



HEATING ELEMENT

- 5 Year Warranty On Heating Element.



SERVICE ASSURED

- After-Sales Service.
- Spare Parts Available.



**Thermostat with
Safety Cut-out**

- Anti-Scalding
- Overheating Protection
- Prevents Fire Hazard



Innovative SF Valve

- ¼ Turn Ceramic Valve
- Stop and Control Water Volume
- Built-in Filter
- Water Saving



Splash Proof Casting IP25

- Against Water Splash
- Against Access To Hazardous Parts
- Safety Certified

Innovative & Safety Features



warm hearted, hand crafted

SOLE DISTRIBUTOR FOR MALAYSIA

JOVEN MARKETING SDN. BHD. (356796 V)
 Lot 2829, Jalan Sungai Kelkat 32/148,
 Off Jalan Sri Gambut, Seksyen 32,
 40460 Shah Alam, Selangor Darul Ehsan, Malaysia.
 Tel : +603 5162 6633 (Hunting Line)
 Fax : +603 5162 3636 (General)
 +603 5162 6634 (After Sales Service)
 Email : jovenmkt@joven.com.my
 Website : www.joven.com.my

BRANCHES

PENANG/ KEDAH/ PERLIS

No 7375, 2nd Floor, Jalan Raja Uda,
 12300 Butterworth, Penang.
 Tel : +604 332 3018
 Fax : +604 332 3198

JOHOR BAHRU

No 12, Jalan Rosmerah 2/13,
 Taman Johor Jaya,
 81100 Johor Bahru, Johor.
 Tel : +607 352 1060
 Fax : +607 352 1061

KUCHING

No 155, Ground Floor, Sekama Road,
 93300 Kuching, Sarawak.
 Tel : +6082 345 158
 Fax : +6082 345 159

IPOH

No 96A, 1st Floor, Jalan Tasek Timur,
 Taman Tasek Indra, 31400 Ipoh, Perak.
 Tel : +605 545 0302
 Fax : +605 545 0318

KOTA BAHRU

3180-F, 1st Floor, Jalan Sultan Ibrahim,
 15050 Kota Bharu, Kelantan.
 Tel : +609 747 9978
 Fax : +609 747 8962

KOTA KINABALU

Lot 16, Taman Industri Warisan Indah,
 Inanam, Jalan Tuaran,
 88450 Kota Kinabalu, Sabah.
 Tel : +6088 429 337
 +6088 439 336
 Fax : +6088 429 332

MELAKA

No 65-2, Jalan SP 1,
 Taman Semabok Perdana,
 75050 Semabok, Melaka.
 Tel : +606 282 6088
 Fax : +606 282 5088

KUANTAN

A6802, Jalan Beserah,
 25200 Kuantan, Pahang.
 Tel : +609 560 4760
 Fax : +609 560 4760

MANUFACTURER

JOVEN ELECTRIC CO. SDN. BHD. (107915-U)
 Lot 2829, Jalan Sungai Kelkat 32/148,
 Off Jalan Sri Gambut, Seksyen 32,
 40460 Shah Alam, Selangor Darul Ehsan, Malaysia.
 Tel : +603 5162 8000
 Fax : +603 5162 1881
 Email : admin@joven-electric.com
 Website : www.joven-electric.com

Authorised Dealer

Pictures are for illustration purpose only. Model outlook and specification may change in the future without prior notice.

www.joven.com.my

Masterpiece Of Perfection



The all new SA Series

Crafted for Perfection

Designed to Complement.

SA Series
 Instant Hot Shower
 SA20e

SA20 Series

Instant Hot Shower
A Perfect Way To Shower

Step into the bold, stylish and luxurious world of Joven SA20 Series Instant Hot Shower. It is the perfect new addition to your bathroom that is designed to give you the best shower whenever you need it most.

Devised with amazing details such as Metallic Spray Paint Casing, Stepless Electronic Power Control, Chrome Finised Slim Slider Bar Design and a 5-Spray Pattern Hand Shower. Joven SA20 is equipped with Built-in Double Pole EELS System for safest shower experience.



Built-in Double Pole EELS System

- 10mA Sensitivity
- Surge Protector
- Test/ Reset Safety Function



Thermostat With Safety Cut-out

- Anti Scalding
- Overheating Protection
- Fire hazard protection



Splash Proof Casing IP25

- Against Water Splash
- Against Access To Hazardous Parts
- Safety Certified



Electronic Power Control


- Stepless Electronic Power Control
- Ideal Shower Temperature
- Energy Saving



Innovative SF Valve

- 1/4 Turn Ceramic Valve
- Stop and Control Water Volume
- Built-in Filter
- Water Saving

CHROME SLIM SLIDER BAR SET

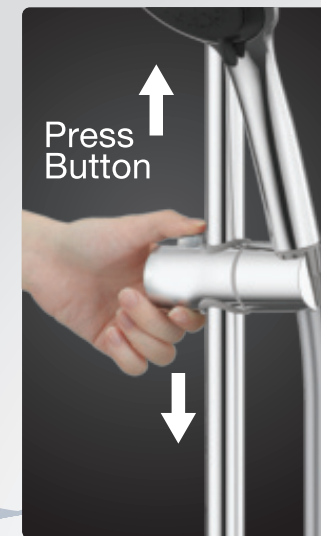


Slim and unique slider bar. Just press to set the hand shower to your ideal position.


Chrome accessories are only available for silver colour.

5 SPRAY OPTIONS


5 ideal shower mode spray pattern can be selected just by turning the spray selector, it's so easy!



Wide Spray



Combo Spray



Jet Spray



Medium Spray



Mix Spray

CHOICE OF MODELS



Specification

Electrical Loading	3.6kW 15A 240Va.c. 50Hz
Min. Water Pressure	10 kPa / 1.45 psi / 0.1 bar
Max. Water Pressure	380 kPa / 55 psi / 3.8 bar
Min. Water Flow	2 litres per Minute
Max. Water Flow	8 litres per Minute
Water Temp. Control	Stepless Electronic Power Control
Inlet / Outlet Connection	ø15mm (1/2" BSP) – Single Point System
Dimensions	221mm X 341mm X 76 mm
Weight	2.8 kg (SA20e)



INTERNAL PARTS

- 1 Year Warranty On Internal Parts




HEATING ELEMENT

- 5 Years Warranty On Heating Element



SERVICE ASSURED

- After-Sales Service Assured
- Door To Door
- Spare Parts Available



Brand Excellence
Award 2009
(Merchandise)
by MITI



SME Brand
Excellence
Award 2012
by SME Corporation




Best Brand
Signature
Award 2013
by BrandLaureate

8" Rotatable Rain Shower Bar Set (Pat.Pending)

SP5X Spray Shower



Selector Valve

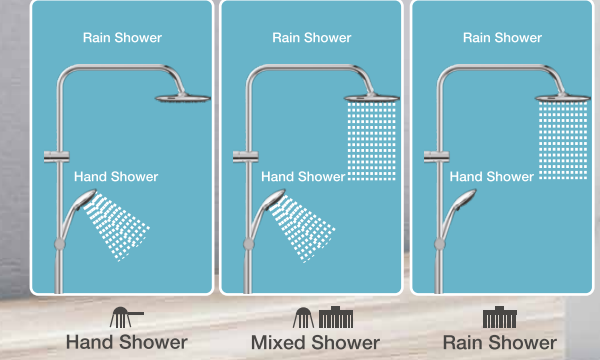

warm hearted, hand crafted

SOLE DISTRIBUTOR FOR MALAYSIA
JOVEN MARKETING SDN. BHD. (356796-V)
 Lot 2829, Jalan Sungai Kelkati 32/148,
 Off Jalan Sri Gambut, Seksyen 32,
 40460 Shah Alam, Selangor Darul Ehsan, Malaysia.
 Tel : +603 5162 6633 (Hunting Line)
 Fax : +603 5162 3636 (General)
 : +603 5162 6634 (After Sales Service)
 Email : jovenmkt@joven.com.my
 Website : www.joven.com.my

MANUFACTURER
JOVEN ELECTRIC CO. SDN. BHD. (107915-U)
 Lot 2829, Jalan Sungai Kelkati 32/148,
 Off Jalan Sri Gambut, Seksyen 32,
 40460 Shah Alam, Selangor Darul Ehsan, Malaysia.
 Tel : +603 5162 8000
 Fax : +603 5162 1881
 Email : admin@joven-electric.com
 Website : www.joven-electric.com

BRANCHES
PENANG / KEDAH / PERLIS
 No 7375, 2nd Floor, Jalan Raja Uda,
 12300 Butterworth, Penang
 Tel : +604 332 3018
 Fax : +604 332 3198

JOHOR BAHRU
 8-02, Jalan Kempas Utama 2/2,
 Taman Kempas Utama,
 81200 Johor Bahru, Johor
 Tel : +607-595 3139
 Fax : +607-595 3195

KUCHING
 SL8, LRG.7, Ensing Timur,
 Jalan Stapok Timur,
 93250 Kuching, Sarawak
 Tel : +6082-686 559
 Fax : +6082-687 559

MELAKA
 No 65-2, Jalan SP 1,
 Taman Semabok Perdana,
 75050 Semabok, Melaka
 Tel : +606-282 6088
 Fax : +606-282 5088

KOTA BHARU
 3180-F, 1st Floor,
 Jalan Sultan Ibrahim,
 15050 Kota Bharu, Kelantan
 Tel : +609-747 9978
 Fax : +609-747 8962

KOTA KINABALU
 Lot 4, Jalan Tombovo Meruntum, Central
 Industrial Park, Kg Tombovo, Putatan,
 Penampang, 88200 Kota Kinabalu, Sabah
 Tel : +6088-773 700
 Fax : +6088-773 701

KUANTAN
 A133-2, Jalan Haji Abdul Aziz,
 25000 Kuantan, Pahang
 Tel : +609-531 5456
 Fax : +609-531 5456

Authorised Dealer

www.joven.com.my

Pictures are for illustration purpose only. Model outlook and specification may change in the future without prior notice.



JOVEN
 since 1983
 Bringing Innovation Home™

The All New SC33 Series Instant Hot Shower
 with 10mA Extra-Safe ELCB Technology



Urban & Stylish Shower

SC33 Series
 Instant Hot Shower
 SC33iP.SC33iP(RS).SC33m.SC33m(RS)



© copyright 02/2021 JOVEN

JOVEN

SC33Series

Instant Hot Shower

Urban & Stylish Shower

Sensational showers with urban and stylish design is what defines the all new SC33 Series. Enjoy quieter showers with the all-new Inverter DC Pump* (iP) features that saves 50% electrical energy and boosts water performance 4 times stronger compared to your ordinary water pressure. The 8" Rotatable Rainshower set lets you adjust to the shower position you desire and a 5 Spray showerhead for the sensational and exuberating shower experience.

*Model SC33iP and SC33iP(RS) only.



SC33m

SC33m(RS)

m : Without Pump

SC33iP

SC33iP(RS)

iP : Inverter Pump

Dark Silver

Dark Grey

White

All models are available in choice of 3 attractive colours: Dark Silver, Dark Grey & White

ENERGY SAVING


Silent Plus Technology + Energy Saving

With Inverter DC Pump

SC33iP & SC33iP(RS) only

JOVEN all new Inverter DC Pump operates in low noise below 35dB and saves electrical consumption up to 50% compared to the conventional booster pump. The water pressure is boosted up to 4 times stronger compared to normal water pressure.

▲ Silent Plus Technology
Experience total bliss with its unique quiet operation. (Below 35dB)

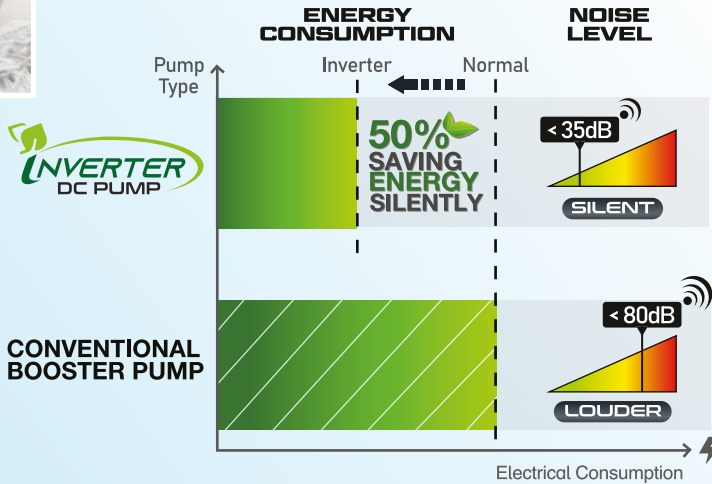

Innovative Features

POWERFUL

4X BOOSTER POWER

Inverter DC Pump with 4X Booster Power (SC33iP & SC33iP(RS) only)

• Stronger Water Pressure

• Press On/Off Pump

QUIET

SILENT PLUS TECHNOLOGY

Quiet Operation below 35dB with Silent Plus Technology (SC33iP & SC33iP(RS) only)

PERFORMANCE

Power Control

• Power 3.6kW 240Va.C

• Stepless Electronic Power Control

CONTROL

Innovative SVF Valve

• 1/2 Turn Ceramic Valve

• Stop & Control Water Volume

• Built-In Filter

• Water Saving

QUALITY

Double Layer 2K Spray Paint Finish

• Long Lasting Quality (Colour model only)

9x Safety Features

High Protection Against Water Splash IP25 Standard

Double Poles ELCB Protection Against Current Leakage 10mA Sensitivity

Anti-Scalding Technology

Thermal Cut-Out Technology

Durable Copper Heating Element


Nylon Fibre Tank With Swirl Technology

Safety Flow Sensor (SFS) Technology

Triple Reinforced Non-Conductive Hose

SVF Valve With Built-In Filter

SPECIFICATIONS	
Electrical Loading	3.6 kW 15.0 A 240 Va.c. 50Hz
Min. Water Pressure	10 kPa / 1.45 psi / 0.1 bar
Max. Water Pressure	380 kPa / 55 psi / 3.8 bar
Min. Water Flow	2 Litres per Minute
Max. Water Flow	8 Litres per Minute
Water Temp. Control	Stepless Electronic Power Control
Inlet / Outlet Connection	ø15 mm (1/2" BSP) - Single Point System
Dimensions	214 x 402 x 85 mm
Weight	SC33m: 2.80 kg & SC33m(RS): 4.20 kg SC33iP: 3.40 kg & SC33iP(RS): 4.70 kg

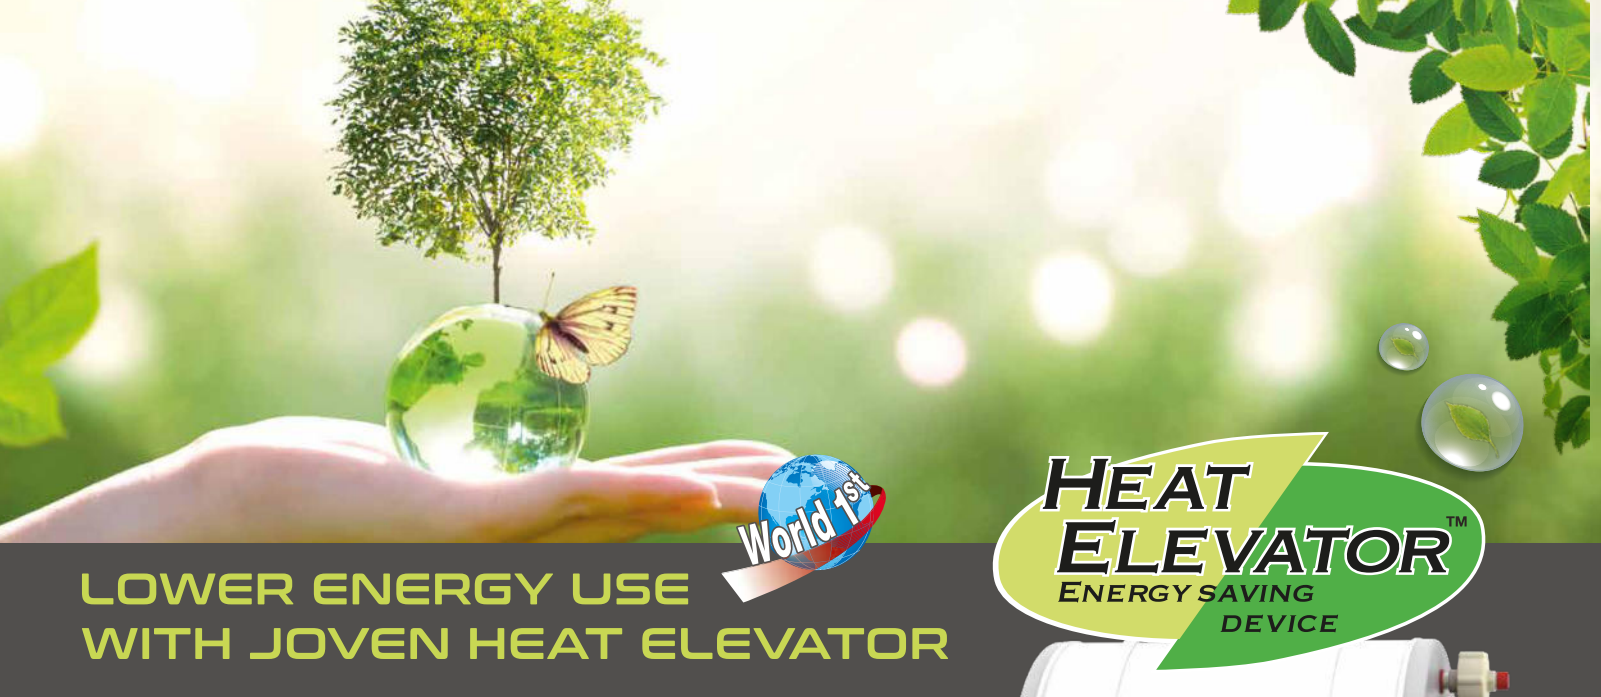

LOWER ENERGY USE WITH JOVEN HEAT ELEVATOR

What is JOVEN Heat Elevator™ (HE) Technology?

Heat Elevator (HE) technology is the world's first innovation that uses patent pending magnetic device that accelerate the convective heat transfer and improve heat stratification in water. This magnetic device is uniquely designed to weaken the inter-molecular bonding energy and accelerate the movement of water molecules to improve heating efficiency.

- Joven Heat Elevator has been widely recognized by leading certification bodies in Singapore

**HEAT
ELEVATOR™**
ENERGY SAVING
DEVICE



**Available for JSH Series With
Heat Elevator (HE) Models only*

**ENERGY
SAVING**

Energy Efficiency Improvement

35L	50L	68L	91L
9%	27%	15%	17%

- HE technology saves an average of 20% energy in different capacities of storage water heater.

**FAST
HEATING**

FASTER CUT-OUT

Saves **20% less time**

Example:

Conventional **With HE**
20 mins **16 mins**
4mins Faster Heating Time

- Enjoy faster heating with average of 20% faster cut-out time.


**ELECTRICAL
SAVING**




- Enjoy lower electricity bills while contributing to a cleaner and greener environment.

How Does It Work?


The comparative photos shows the effect of HE which cause more heat loops than conventional storage water heater. The heated water is spread wider across the heater tank, thus ensuring less heat trapped at the heating element, therefore prolong the heating element life and generate more hot water in the tank.

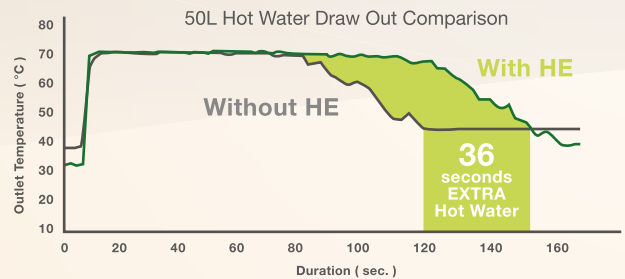

Note :
1. Test results are courtesy from TUV SUD PSB PTE LTD.
2. Test method is based on USA test guidelines (DOE 10 CFR Part 430) as specified by Singapore Standard (SS 530 : 2006)
3. Incoming water condition : temperature 14.4°C, pressure 2.75 bar & flow rate 11.4 Litre/min.
4. Result varies and are based on 25L to 91L capacities.
5. Available for JSH models only.

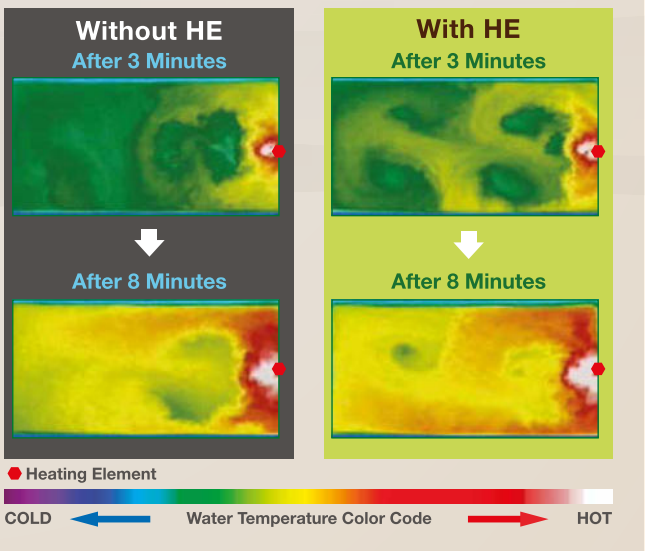

Installation Dimension

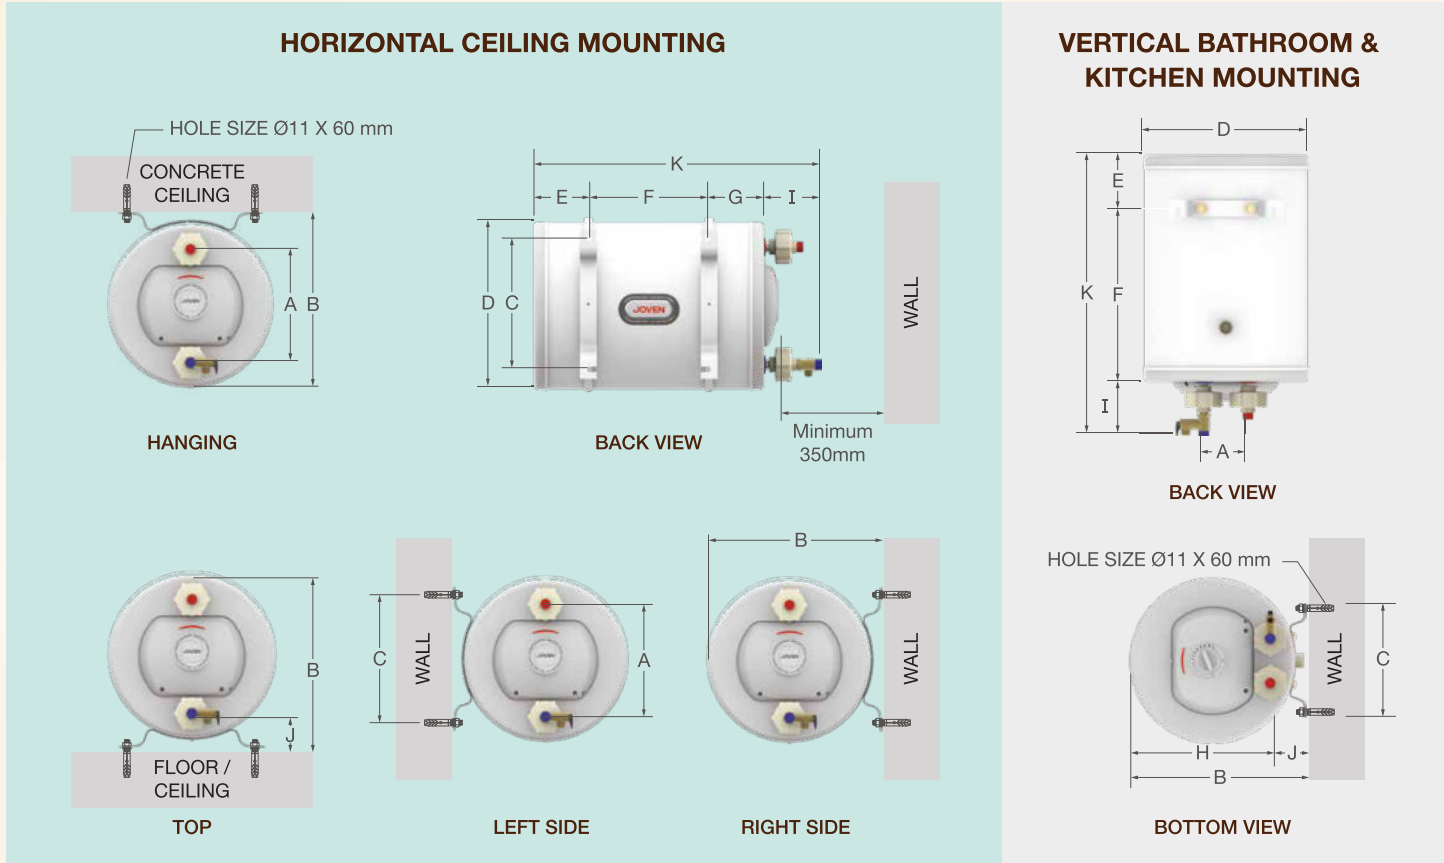

Model	Tank Capacity Litre (Imp. Gal)	Dimensions (mm)											Time Taken To Heat * (Minutes)	Approx. Wt. Kg (Empty/Full)
		A	B	C	D	E	F	G	H	I	J	K		
JSH 25	25 (5.5 Imp. Gals)	260	405	265	381	121	150	121	-	130	92	522	20	12 / 37
JSH 35	35 (7.7 Imp. Gals)	260	405	265	381	121	269	121	-	130	92	641	30	14 / 49
JSH 50	50 (11.0 Imp. Gals)	260	405	265	381	121	438	121	-	130	92	810	45	17 / 67
JSH 68	68 (15.0 Imp. Gals)	260	405	265	381	121	648	121	-	130	92	1020	60	20 / 88
JSH 91	91 (20.0 Imp. Gals)	260	405	265	381	121	914	121	-	130	92	1286	80	25 / 116
JSV 25	25 (5.5 Imp. Gals)	100	393	217	372	121	271	-	316	130	77	522	20	12 / 37
JSV 35	35 (7.7 Imp. Gals)	100	393	217	372	121	390	-	316	130	77	641	30	14 / 49
JSV 50	50 (11.0 Imp. Gals)	100	393	217	372	121	559	-	316	130	77	810	45	17 / 67

* Approximate time taken to heat up to 70°C. Inlet water temperature at 27°C. (3kW / 240V)

SOLE DISTRIBUTOR FOR MALAYSIA

JOVEN MARKETING SDN. BHD. (1967796-V)
Lot 2829, Jalan Sungai Kelkati 32/148, Off Jalan Sri Gambut, Seksyen 32,
40460 Shah Alam, Selangor Darul Ehsan, Malaysia.
Tel : +603 5162 6633 (Hunting Line)
Fax : +603 5162 3636 (General)
Email : +603 5162 6634 (After Sales Service)
Email : jovenmkt@joven.com.my
Website : www.joven.com.my

MANUFACTURER

JOVEN ELECTRIC CO. SDN. BHD. (107915-U)
Lot 2829, Jalan Sungai Kelkati 32/148, Off Jalan Sri Gambut, Seksyen 32,
40460 Shah Alam, Selangor Darul Ehsan, Malaysia.
Tel : +603 5162 8000
Fax : +603 5162 1881
Email : admin@joven-electric.com
Website : www.joven-electric.com

Authorised Dealer

Pictures are for illustration purpose only. Model outlook and specification may change in the future without prior notice.

www.joven.com.my

© copyright 03/2021 JOVEN



**ENHANCED
DRY-BURN
PROTECTION**
Patent Pending

JOVEN
since 1983
Bringing Innovation Home™

CENTRALISED MULTI-POINT SYSTEM Storage Water Heater

With Quad Safety System &
Enhanced Dry-Burn Protection

**4X
QUAD
SAFETY
SYSTEM**

**HEAT
ELEVATOR™**
ENERGY SAVING
DEVICE

**20%
ENERGY SAVER**




YOUR RELIABLE HOT WATER SOLUTION

Storage Water Heater

CENTRALISED MULTI-POINT SYSTEM WITH ENHANCED DRY-BURN PROTECTION

Introducing the latest version of Centralised Multi-Point Storage Water Heater with Enhanced Dry-Burn Protection from JOVEN. Manufactured according to International Certified Standards, reliability is assured with Quality materials and Quad Safety System. The Enhanced Dry-Burn Protection technology auto-trips to protect the heating element in the occurrence of a dry-run or absence of water within the tank.

Enjoy energy saving and longer-lasting hot water with the high density CFC-Free Polyurethane Insulation Foam and the Heat Elevator (HE) version of Storage Water Heater. JOVEN Storage Water Heater is the ultimate choice for a more luxurious and hotter water solution throughout your home from shower, bathtub, jacuzzi, rainshower, basin or sink tap. With our technical expertise, your comfort and safety is assured with hotter water at the turn of your mixer tap anytime of the day with JOVEN.

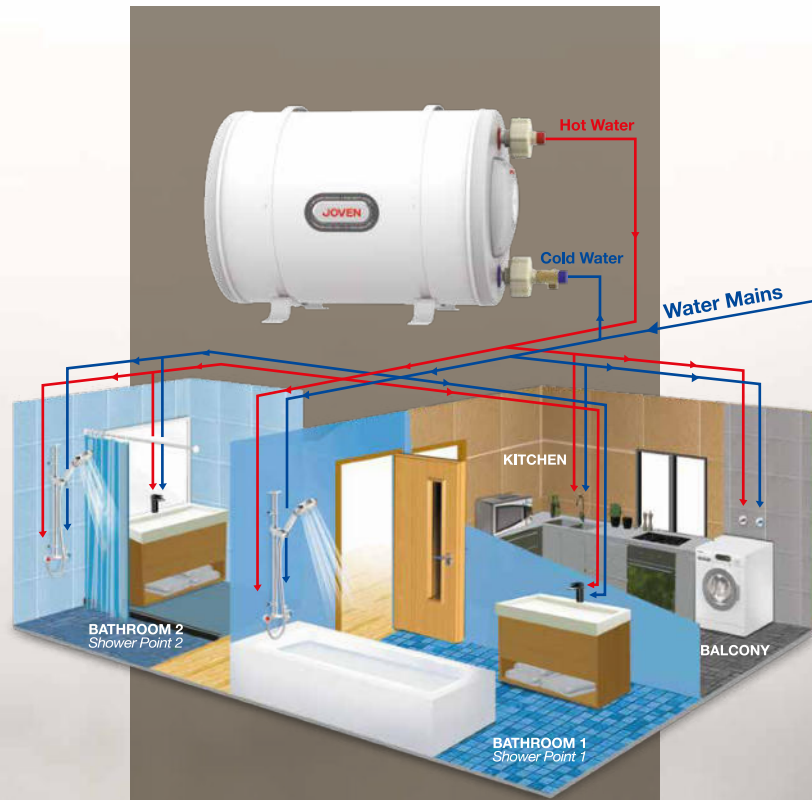

BATHTUB



SHOWER



JACUZZI



WASH BASIN



KITCHEN SINK



WASHING MACHINE



ENHANCED SAFETY

With Quad Safety System (QSS)

Peace of mind with built-in safety system designed for prolonged usage.

- Enhanced Dry-Burn Protection
- Thermostat With Thermal Cut-Off
- Pressure Relief & Drain Valve
- Isolation Barrier (For Malaysia Only)



POWERFUL

- Delivers up to 70°C of hot water
- Allows sharing between points
- Standard wattage 3kW / 240V



EASY MOUNTING

- Patented Universal Mounting Ring Bracket (For JSH Only)
- Flexible to all horizontal positions (Left, Right, Hanging and Top Mounting)



DURABLE

Built from high quality materials that withstand rust and rupture, thus ensuring long-lasting life and stellar performance.

- Stainless Steel Tank
- Electro-Galvanised Steel Epoxy Coated Enclosure
- High Quality Engineering Plastic



GREEN INNOVATION

- Heat Elevator Technology saves energy by 20%
- Environmental Friendly CFC-Free High Density Polyurethane Insulation Foam for maximum energy saving



JSH SERIES


Horizontal Ceiling Mounting



JSH 25
25 Litres
5.5 Imp. Gallons



JSH 35
35 Litres
7.7 Imp. Gallons

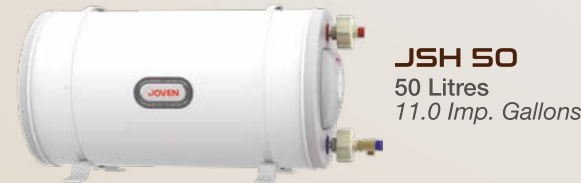

JSH 50
50 Litres
11.0 Imp. Gallons



JSH 68
68 Litres
15.0 Imp. Gallons



JSH 91
91 Litres
20.0 Imp. Gallons



*Optional with Heat Elevator (Only for JSH with HE Series)

JSV SERIES

Vertical Bathroom & Kitchen Mounting



JSV 25
25 Litres
5.5 Imp. Gallons



JSV 35
35 Litres
7.7 Imp. Gallons





Adjustable Temperature Control Knob
Conveniently set your ideal water temperature



JSV 50
50 Litres
11.0 Imp. Gallons

Identification Details

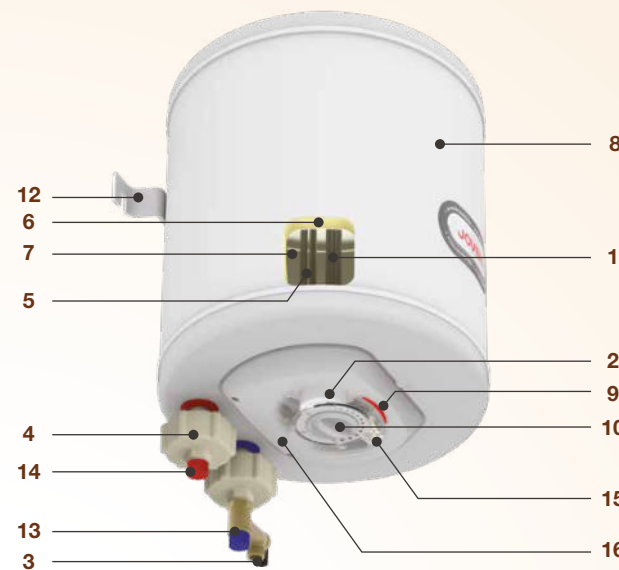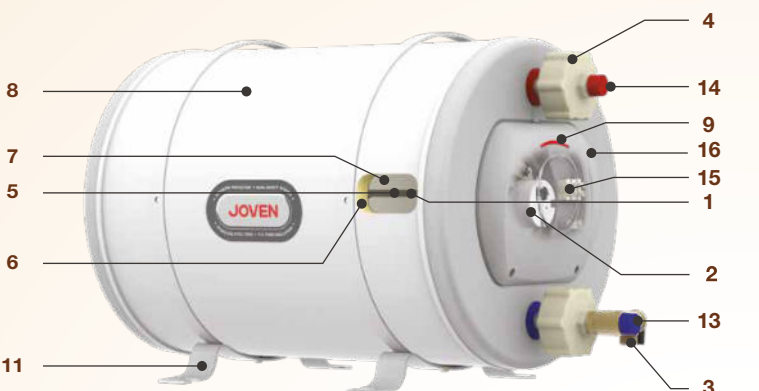

JOVEN

Quad Safety System (QSS)



- Enhanced Dry-Burn Protection**
 - Thermostat trips when dry-burn occurs
 - Protects heating element
- Thermostat With Thermal Cut-Off**
 - Thermostatically controlled at 70°C and cut-in at 55°C
- Pressure Relief & Drain Valve**
 - Preset at 8 ± 1 bar to relief any excessive pressure built up within the tank
- Isolation Barrier (For Malaysia Only)**
 - Isolates electrical leakage

INNOVATIVE AND STANDARD FEATURES

- Heating Element**
 - High quality incoloy material for longer reliability
- Tank Insulation For Heat Retention**
 - CFC-Free Polyurethane Insulation Foam 2.5 lb/ft³ or 40kg/m³ for longer-lasting hot water
- Inner Tank Material**
 - Stainless Steel 304 Standard (Thickness 1.2 mm)
- Outer Tank Material**
 - Electro-galvanised steel
 - Anti-corrosion treated
 - Epoxy coated for long-lasting finish

Capacity Recommendation

CAPACITY	WASH BASIN	SHOWER	BATHTUB	JACUZZI	RAINSHOWER	KITCHEN SINK (Individual Unit)
25 Litres	•	or 1	-	-	-	Low Usage
35 Litres	•	and 1	-	-	or 6 Inch	Medium Usage
50 Litres	•	2	or Small	-	or 8 Inch	High Usage
68 Litres	•	3	or Medium	or Medium	or 10 Inch	Commercial
91 Litres	•	4	or Large	or Large	or 12 Inch	Commercial

*Kitchen Sink to have Individual Unit from Shower Unit
*Recommended Flow Rate of 6L/min - 8L/min

- Indicator Lamp**
 - Displays red light when heater is On
- Adjustable Temperature Control Knob**
 - Adjust temperature from Low, Med to High (For JSV models only)


INSTALLATION

- Mounting Ring Bracket (For JSH model only)**
 - Patented Universal Mounting Ring Bracket
 - Allows flexibility in mounting the heater in any horizontal positions
 - Expansion bolts for safer mounting
- Hook-On Bracket (For JSV model only)**
 - Vertical Hook-On Bracket
 - Snap-on hook design for easy installation
 - Anti-rust and epoxy coated for better durability
 - Expansion bolts for safer mounting
- Inlet Connection**
 - ½" BSP Stainless Steel Pipe
- Outlet Connection**
 - ½" BSP Stainless Steel Pipe
- Wire Connection**
 - 3-Way Wire Connector ; 3.0 kW ; 15 - 20 Amp
- Installation Cover**
 - High quality flame retardant ABS plastic



warm hearted, hand crafted

Piping Connection

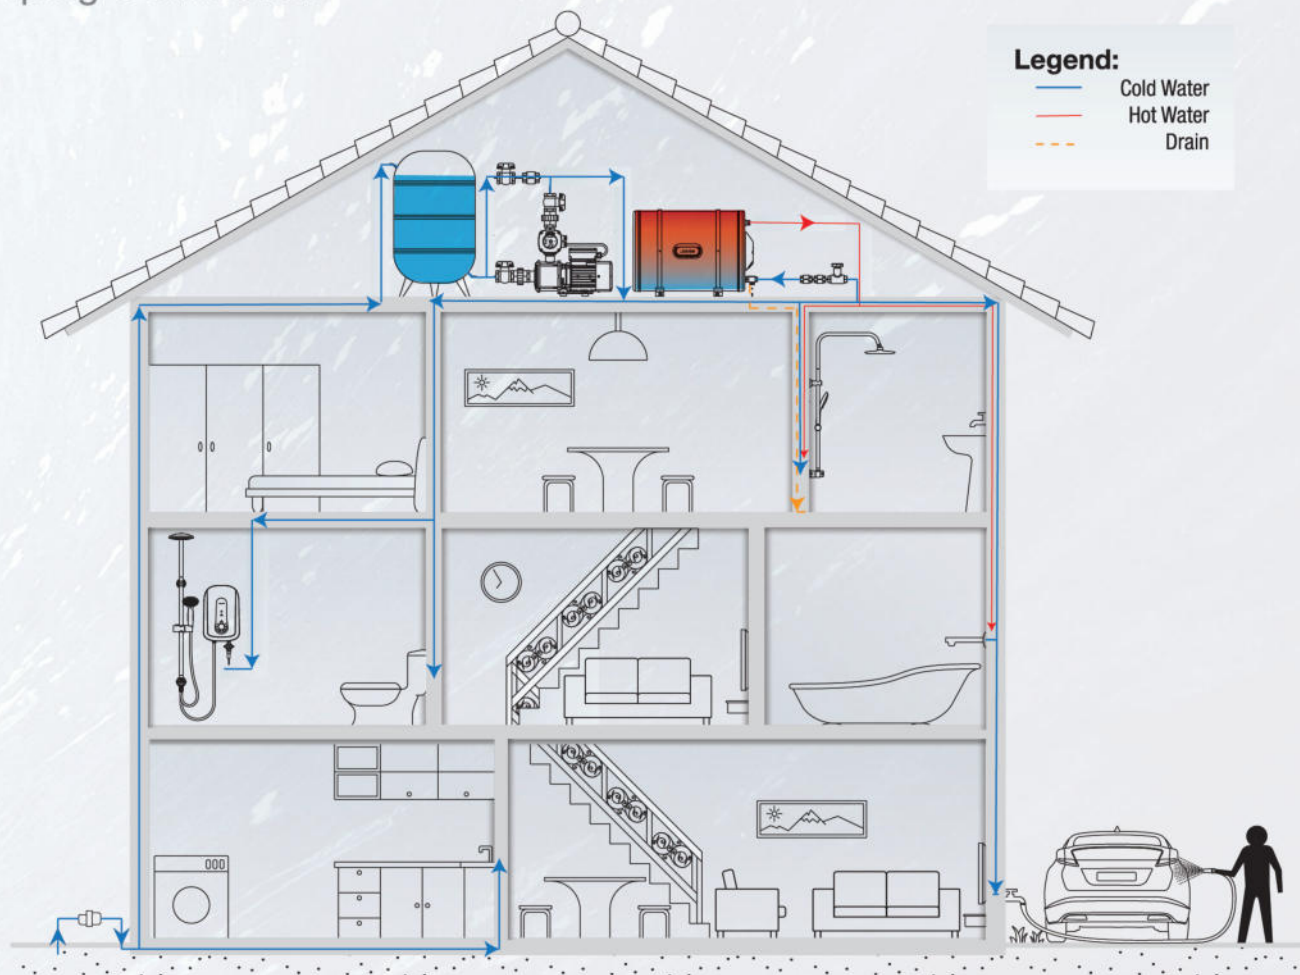

Sole Distributor:

JOVEN MARKETING SDN. BHD. (356796-V)

Lot 2829, Jalan Sungai Kelati 32/148, Off Jalan Sri Gambut, Seksyen 32, 40460 Shah Alam, Selangor Darul Ehsan, Malaysia.

Tel: +603 5162 6633 (Hunting Line) Fax: +603 5162 3636 (General) +603 5162 6634 (After Sales Service)

Email: jovernmkt@joven.com.my

Branches:

• **PENANG/KEDAH/PERLIS** +604 332 3018 • **IPOH** +605 545 0302 • **MELAKA** +606 282 6088

• **JOHOR BAHRU** +607 595 3139 • **KUANTAN** +09 531 5456 • **KOTA BHARU** +609 747 9978

• **KUCHING** +6082 686 559 • **KOTA KINABALU** +6088 429 337

Manufactured by:

JOVEN ELECTRIC CO. SDN. BHD. (107915-U)

www.joven.com.my

** Pictures are for illustration purpose only. Model outlook and specification may change in the future without prior notice.



EUROPE



CERTIFIED
MANUFACTURER

Authorised Dealer

© copyright 10/2017 JOVEN

JOVEN
since 1983
Bringing Innovation Home™

The All New **JHP Series** Water Pump
Powerful, Efficient, Quiet and Durable.



JHP Series
STAINLESS STEEL AUTOMATIC DOMESTIC
WATER PUMP



Brand Excellence
Award 2009
Merchandise



SME Brand
Excellence Award
2012



The BrandLaureate
Brand Innovator of the Year &
Brand Excellence Award
2017

BETTER SHOWER PRESSURE THROUGHOUT YOUR HOME



Identification Details

1 - Electronic Pressure Control

Automatically control pump starts and stops whenever a valve is opened or closed respectively.

2 - Triple Indicator Light

Green : Power, Red : Fault, Yellow : Pump

3 - RESET Button

Reset the system whenever there is a fault condition.

4 - Discharge Port

Delivers the water from the pump into the controller.

5 - Outlet

Delivers the water out.

6 - Stainless Steel Pump Housing

SUS304 is able to withstand rust and rupture.

7 - Alloy Pump Clamp Plate

Lightweight yet durable aluminium alloy which holds the stainless steel pump housing.

8 - Suction Port

Water delivery inlet.

9 - Stainless Steel Impellers

High efficiency impellers design with SUS316 rust-free material to withstand high dynamic stresses.

10 - Mechanical Seal

Silicon carbide mechanical seal for longer operation and durability.

11 - Cable and Plug

Extra durable moulded plug with silicon cables.

12 - Terminal Box

Easy maintenance compartment for wiring access to the motor wires.

13 - Ventilation Cover

Allow air to cool the motor yet prevents your finger access.

14 - Motor with Built-in Thermal Cut-Off

High efficiency and low noise motor with overheating protection.

15 - Mounting Bracket

Designed for firm and balance support.

16 - Rubber Mounting

Anti vibration rubber to reduce noise.

Model Line-up



POWERFUL & EFFICIENT



SIMULTANEOUS
WATER
BOOSTER



MULTISTAGE
CENTRIFUGAL
PUMP

PROTECTED

Peace of mind with built-in protection technology designed for prolong usage.



DRY
RUNNING
PROTECTION



MOTOR
OVERHEATING
PROTECTION



IP55
SPLASH PROOF
CASING


QUIET

Precise manufacturing process ensure less vibration and noise.



NOISE
REDUCTION
TECHNOLOGY

EASY TO INSTALL

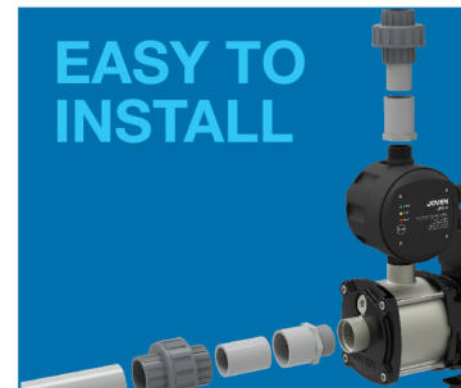

DURABLE

Built from high quality material that withstand high dynamic stress and rust to ensure long-lasting life and stellar performance.




RUST FREE
MATERIALS




Performance Data


Pressure / Height Vs. Volume

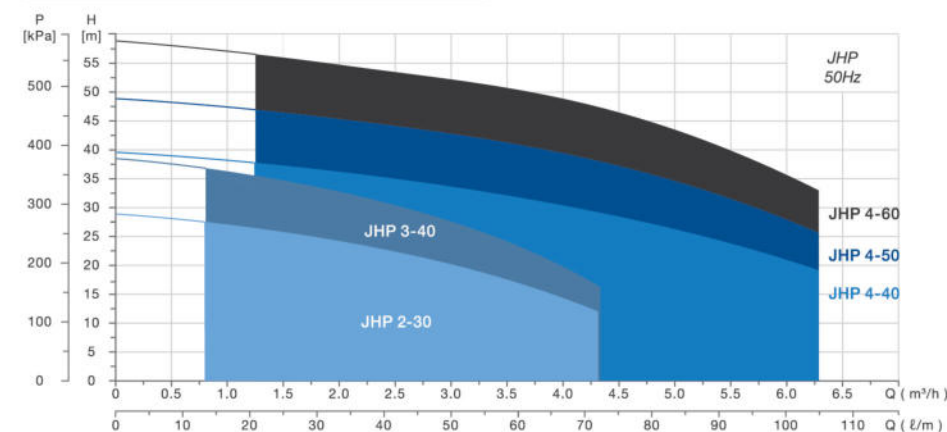

Net Positive Suction Head (NPSH) & Evapotranspiration (ETa) Rates

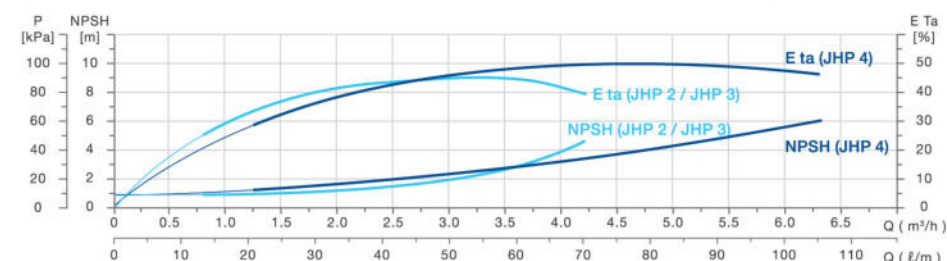


Power (P₂) Vs. Volume

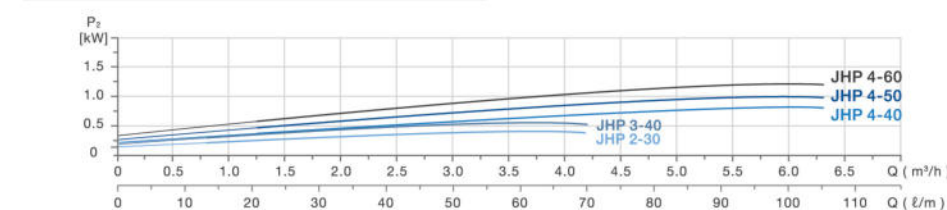

Specification

JHP 2-30	JHP 3-40	JHP 4-40	JHP 4-50	JHP 4-60
P ₂ Max. (Kw / Hp)				
0.37 kW 0.50 Hp	0.55 kW 0.75 Hp	0.75 kW 1.00 Hp	1.00 kW 1.35 Hp	1.30 kW 1.75 Hp
Pipe Conn. (BSP) (Inlet / Outlet)				
1" / 1"	1" / 1"	1¼" / 1"	1¼" / 1"	1¼" / 1"
Weight (kg)				
9.2	10.3	12.5	13.7	17.6
Dimensions (mm)				

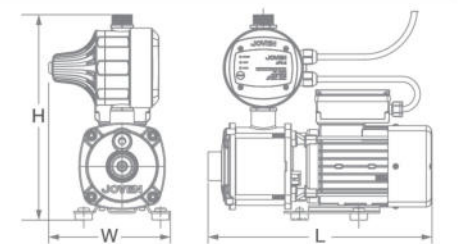

L : 318	L : 360	L : 362	L : 380	L : 446
W : 198	W : 198	W : 198	W : 198	W : 209
H : 332	H : 332	H : 332	H : 332	H : 344

Simultaneous Usage Recommendation

