



LIGHT DUTY SERIES

SUPER-R®

Company Profile

ISO 9001:2015
INTERNATIONAL CERTIFICATION

SIRIM TESTED
BS EN 61386-21: 2004 + A11 : 2010

Megahock Pipes & Profile Manufacturing Company ('MEGAHOCK') was incorporated in 1996 and is one of renowned Malaysian manufacturer who specialises in manufacturing uPVC electrical wiring products. We provide high-quality products including uPVC conduits & fittings, uPVC trunking, uPVC underfloor trunking, uPVC cable slab, flexible conduit for a safe cable management.

We aspire to be the wiring partner in local & international communities. With this thought in mind, we strive to serve what our customers value the most: high-quality uPVC wiring product that enable safe cable management, the compliance to local & international standard, expedient & consultative service.

Our unrest commitment to ensure consistently high product quality had led us to achieve a range of third-party accreditation to international & local standard such as JKR (Jabatan Kerja Rakyat), SIRIM QAS (Standard of Industrial and Research Institute in Malaysia), PSB TUV certifications. Moreover, our production facility is accredited to ISO 9001:2015 Quality Management.

Our dedication to provide quality product and service over the years had earned us a trusted image in both domestic & international communities. The grand new opening of new factory on a 3-acre land located at Senai, Johor in 2009 is another recognition of success of this company and its dedicated staffs.



Committed To Quality

Our products meet and exceed industry standard so you can be assured in specifying, purchasing or installing our product.

*“We aspire to be
the wiring partner for
uPVC electrical products
in the markets we serve”*



uPVC Conduit

A rigid conduit of light-duty class (222112) for electrical installation in accordance with **BS EN 61386-21 : 2004 + A11 : 2010**

Code	Size (mm)	Outside Diameter (mm)		Inside Diameter (mm)		Standard Packing (Bundles)	Colour
		Min	Max	Min	Max		
PSA20	20	19.8	20.04	16.9		50	○
PSA25	25	24.8	25.04	21.5		50	○

*Length : 2.9m or upon request

** Make to order

STEP TO TEST

SAFETY AND DURABILITY OF uPVC CONDUIT

Self-extinguish



QUALITY TRUSTED


High-quality uPVC wiring products that enables safe cable management in our community with our endless pursuit for excellence.



WHY CHOOSE US

TESTED SAFETY AND DURABILITY FOR COMMUNITY

We continuously adapting to new technological advancement & exploring new products & solutions.

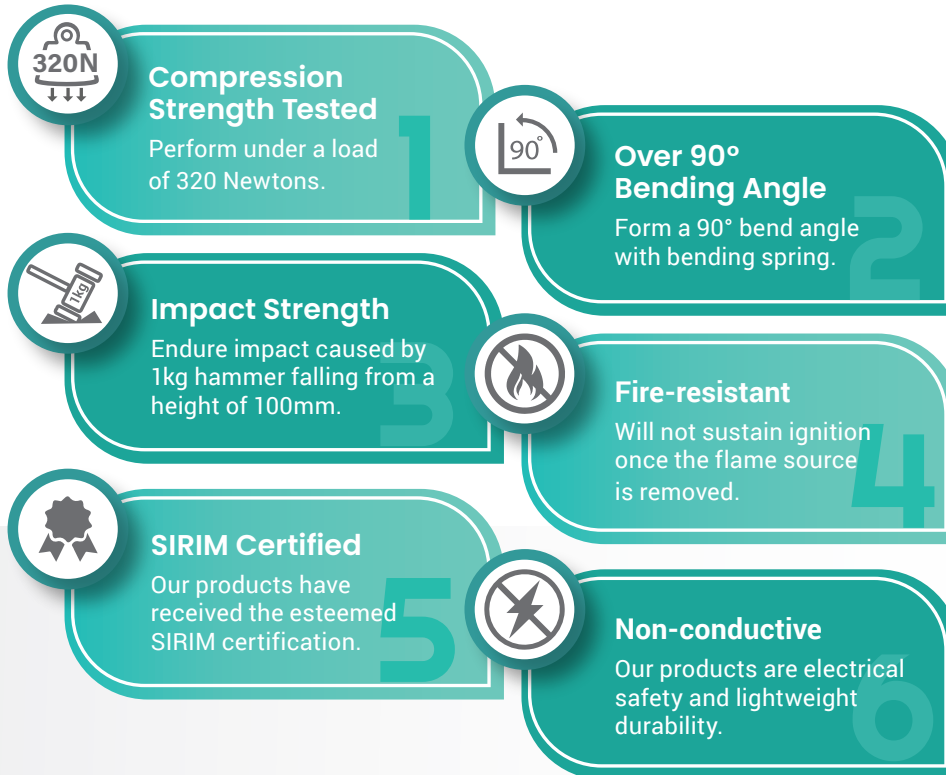

Test	Requirement	Duty
Resistance of Compression	320 Newtons	2
Resistance to Impact	1kg Load with Fall Height 100mm	2
Minimum Service Temperature	-5 Degree Celsius	2
Maximum Service Temperature	60 Degree Celsius	1
Resistance to Bending	Rigid Conduit	1
Electrical Properties	Electrical Insulating	2



Accessories

We continuously adapting to new technological advancement & solutions to provide high-quality products that enables safe cable management in our community with our endless pursuit for excellence.



CIRCULAR 1 WAY BOX

Code	Size	ØOD	Pcs	Colour
ASACB201	20MM	65MM	500	○
ASACB251	25MM	65MM	500	○



LID COVER (SCREW)

Code	Diameter	Pcs	Colour
ASALC	65MM	3000	○



CIRCULAR 2 WAY BOX

Code	Size	ØOD	Pcs	Colour
ASACB202	20MM	65MM	500	○
ASACB252	25MM	65MM	500	○



SOCKET / COUPLING

Code	Size	Pcs	Colour
ASAS20	20MM	3000	○
ASAS25	25MM	2000	○



CIRCULAR 3 WAY BOX

Code	Size	ØOD	Pcs	Colour
ASACB203	20MM	65MM	500	○
ASACB253	25MM	65MM	500	○



CLIP SADDLES / U-CLIP

Code	Size	Pcs	Colour
ASAU20	20MM	5000	○
ASAU25	25MM	3000	○



CIRCULAR 4 WAY BOX

Code	Size	ØOD	Pcs	Colour
ASACB204	20MM	65MM	500	○
ASACB254	25MM	65MM	400	○



INSPECTION TEE

Code	Size	Pcs	Colour
ASAIT20	20MM	500	○
ASAIT25	25MM	500	○



CIRCULAR ANGLE BOX

Code	Size	ØOD	Pcs	Colour
ASACB205	20MM	65MM	500	○
ASACB255	25MM	65MM	500	○



INSPECTION BEND

Code	Size	Pcs	Colour
ASAIB20	20MM	500	○
ASAIB25	25MM	500	○



(CPC) PROTECTOR COVER (CLIPS)

Code	Diameter	Pcs	Colour
ASACPC	65MM	2000	○



INSPECTION ELBOW

Code	Size	Pcs	Colour
ASAI20	20MM	500	○
ASAI25	25MM	500	○

Superflex Flexible Conduit

Our Superflex Flexible Conduit are made from a specially formulated thermoplastics material. Its superior flexibility enables laying long runs of cable without excessive joint and provide extra care for cable to withstand repetitive motions.

Code	Size (mm)	Thickness (mm)	Length	Packing (Roll)	Colour
FX2040	20	0.35 ± 0.1	40M	7	○ ●
FX2540	25	0.35 ± 0.1	40M	7	○ ●

*** Refer for sales personnel for other sizes.

ADVANTAGES



Different Colour
Options Available



Maintain Internal
Diameter in Tight
Radius Bend



Resistance to
Most Chemicals



Tensile Strength to
Withstand Weight



*Aspire to be the wiring partner
for uPVC electrical products in
the markets we serve.*

CONTACT US



P : +607-595 1012
E : megahock@gmail.com
W : www.megahock.com